

sunlite[®]

Providing All of Your Lighting Needs Since 1980

2024

LED BULB CATALOG



ABOUT US

For over 40 years Sunshine Lighting has been providing quality and affordable solutions to the lighting industry and has evolved into a multinational enterprise, growing at a rapid pace to become a leading lighting manufacturer in North America. Sunshine Lighting offers a wide array of products under multiple brands including MKS LED®, Ambiate® and Sunlite® lamps and luminaires. We take great pride in maintaining a personal relationship with each customer. Sunshine Lighting has gained a reputation for quality and affordability while keeping up with the latest technologies.

The Sunlite® brand was introduced in 1996 to provide select lighting technologies consisting of Indoor, Industrial and Outdoor LED and Non-LED fixtures, as well as LED, Compact Fluorescent, HID, Halogen, Decorative, Miniature, Specialty, Stage and Studio lamps. Our dedicated team of technical and product specialists ensures that our products designed with safety and the environment in mind. Most products carry the Underwriters Laboratories (UL), Intertek's ETL Listing, Department of Energy (DOE) Energy Star certifications, Design Lights Consortium (DLC) qualified products listing, and/or the American Lighting Association (ALA) among others.

Through customer interaction and feedback, we introduce new and innovative products to the marketplace as well as continually improving our existing line of items to meet the high expectations our customers have come to rely on us. In addition, we provide exclusive service to customers whether it's a product tweak, modification, or full custom product, Sunshine Lighting's dedicated engineering and project management team is ready assist.

sunlite®

Copyright ©2024 Sunlite

For Product inquiries or to place an order, please contact us at:

TOLL FREE PHONE: 800.605. BULB

VISIT: www.sunlite.com

For general information and request a catalog: info@sunshinelighting.com

Sales department: sales@sunshinelighting.com

Terms & Conditions <https://sunlite.com/terms-of-use>

NYC Warehouse
744 Clinton Street
Brooklyn, NY 11231
Tel: 718.768.7000
Fax: 718.768.0970


TABLE OF CONTENTS

A19 General Purpose Lamps	4-6
A19 General Purpose Colored	6-7
UV Black Lamp	7
A19 Omni General Purpose Lamps	8
Dusk To Dawn Lamps	8
Shabbulb Lamps	9
Blinker Lamps	9
3 Way Lamps	10
High Lumen A Bulb	11
Appliance Bulbs	11
Globe Decorative Lamps	12-15
Reflector Lamps	16
Colored Reflector Lamps	18
Mini Reflector Lamps	19-20
Reflector Lamps	20
Sign Lamps	20-21
Night Lights	22
Decorative Lamps	21-22
Filament Style Tubular	23
Decorative Lamps	24
Elevator Bulb	25
Miniature Tubular	24
Colored Tubular	25
Halogen Alternative	25
Linestra Lamps	26
Plug-In Lamps	26
Refrigerator Display Strip	26
Plug-In Lamps	27
T5 / T8 Advanced Bypass Dual End	28
T5 / T8 Plug and Play	29
T8 Single & Dual End Hybrid	30
High Lumen Lamps	30-31
Garage Light	31

A19 General Purpose Lamps

40/60/75/100 Watt Equivalent

120 Volts
Medium Screw (E26)

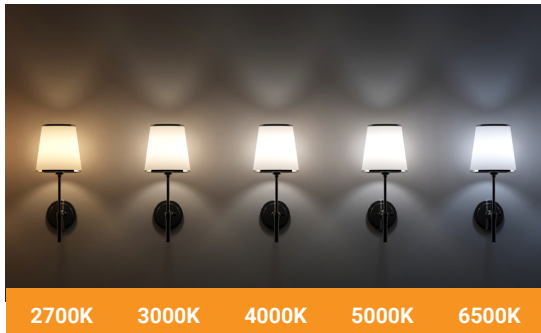

Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (m)	Features	CTN
40 Watt Equivalent Dimmable												
88347-SU	A19/LED/6W/E/D/27K	6	40	450	75	83	Frosted	2700K	25000	4.25	DIM,DL,EXF,ES	6
81503-SU	A19/LED/5.5W/930/6PK	5.5	40	450	81	90	Frosted	3000K	25000	4.17	DIM,DL,ES	6
81504-SU	A19/LED/5.5W/940/6PK	5.5	40	450	81	90	Frosted	4000K	25000	4.17	DIM,DL	6
88234-SU	A19/LED/6W/E/D/50K	6	40	450	75	84	Frosted	5000K	25000	4.25	DIM,EXF,ES	6
88383-SU	A19/LED/6W/65K	6	40	480	80	80	Frosted	6500K	25000	4.25	DIM,DL,EXF	6
81506-SU	A19/LED/5.5W/965/6PK	5.5	40	450	81	90	Frosted	6500K	25000	4.17	DIM,DL,ES	6
40 Watt Equivalent Non Dimmable												
80922-SU	A19/LED/6W/27K/3PK	6	40	450	75	80	Frosted	2700K	11000	4.17	DL	6
80923-SU	A19/LED/6W/30K/3PK	6	40	450	75	80	Frosted	3000K	11000	4.17	DL	6
80924-SU	A19/LED/6W/40K/3PK	6	40	450	75	80	Frosted	4000K	11000	4.17	DL	6
80928-SU	A19/LED/6W/50K/3PK	6	40	450	75	80	Frosted	5000K	11000	4.17	DL	6
80929-SU	A19/LED/6W/65K/3PK	6	40	450	75	80	Frosted	6500K	11000	4.17	DL	6
60 Watt Equivalent Dimmable 90 CRI												
81507-SU	A19/LED/9W/927/V2/6PK	9	60	800	89	90	Frosted	2700K	25000	4.41	DIM,DL	6
81508-SU	A19/LED/9W/930/V2/6PK	9	60	800	89	90	Frosted	3000K	25000	4.41	DIM,DL	6
81509-SU	A19/LED/9W/940/V2/6PK	9	60	800	89	90	Frosted	4000K	25000	4.41	DIM,DL	6
81510-SU	A19/LED/9W/950/V2/6PK	9	60	800	89	90	Frosted	5000K	25000	4.41	DIM,DL,ES	6
81511-SU	A19/LED/9W/965/6PK	9	60	800	89	90	Frosted	6500K	25000	4.41	DIM,DL	6
60 Watt Equivalent Non Dimmable												
80864-SU	A19/LED/9W/27K/3PK	9	60	800	89	80	Frosted	2700K	15000	4.25	DL,EXF	6
80682-SU	A19/LED/9W/30K/3PK	9	60	800	89	80	Frosted	3000K	15000	4.25	DL,EXF	6
80688-SU	A19/LED/9W/40K/3PK	9	60	800	89	80	Frosted	4000K	15000	4.25	DL	6
80739-SU	A19/LED/9W/50K/3PK	9	60	800	89	80	Frosted	5000K	15000	4.25	DL,EXF	6
80681-SU	A19/LED/9W/65K/3PK	9	60	800	89	80	Frosted	6500K	15000	4.25	DL,EXF	6
60 Watt Equivalent Multi-Volt												
80125-SU	A19/LED/9W/MV/30K	9	60	810	90	80	Frosted	3000K	25000	4.25		6
80126-SU	A19/LED/9W/MV/50K	9	60	810	90	80	Frosted	5000K	25000	4.25		6



3 Pack Box



6 Pack Box

Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
75 Watt Equivalent Dimmable												
81512-SU	A19/LED/11W/927/6PK	11	75	1100	100	90	Frosted	2700K	25000	4.57	DIM,DL	6
81513-SU	A19/LED/11W/930/6PK	11	75	1100	100	90	Frosted	3000K	25000	4.57	DIM,DL,ES	6
81514-SU	A19/LED/11W/940/6PK	11	75	1100	100	90	Frosted	4000K	25000	4.57	DIM,DL,ES	6
81515-SU	A19/LED/11W/950/6PK	11	75	1100	100	90	Frosted	5000K	25000	4.57	DIM,DL,ES	6
81516-SU	A19/LED/11W/965/6PK	11	75	1100	100	90	Frosted	6500K	25000	4.57	DIM,DL,ES	6
75 Watt Equivalent Non Dimmable												
80860-SU	A19/LED/11W/27K/3PK	11	75	1100	100	80	Frosted	2700K	15000	4.25	DL	6
80859-SU	A19/LED/11W/30K/3PK	11	75	1100	100	80	Frosted	3000K	15000	4.25	DL	6
80862-SU	A19/LED/11W/40K/3PK	11	75	1100	100	80	Frosted	4000K	15000	4.25	DL	6
80854-SU	A19/LED/11W/50K/3PK	11	75	1100	100	80	Frosted	5000K	15000	4.25	DL,EXF,ES	6
80853-SU	A19/LED/11W/65K/3PK	11	75	1100	100	80	Frosted	6500K	15000	4.25	DL,EXF	6
100 Watt Equivalent Dimmable												
81571-SU	A19/LED/15W/927/6PK	15	100	1600	107	90	Frosted	2700K	25000	4.57	DIM,DL,ES	6
80806-SU	A19/LED/15W/30K	15	100	1600	107	80	Frosted	3000K	25000	4.70	DIM,DL,ES	6
81518-SU	A19/LED/15W/930/6PK	15	100	1600	107	90	Frosted	3000K	25000	4.65	DIM,DL,ES	6
81519-SU	A19/LED/15W/940/6PK	15	100	1600	107	90	Frosted	4000K	25000	4.65	DIM,DL,ES	6
100 Watt Equivalent Dimmable 90 CRI												
81517-SU	A19/LED/15W/927/6PK	15	100	1600	107	90	Frosted	2700K	25000	4.65	DIM,DL	6
81520-SU	A19/LED/15W/950/6PK	15	100	1600	107	90	Frosted	5000K	25000	4.65	DIM,DL	6
81521-SU	A19/LED/15W/965/6PK	15	100	1600	107	90	Frosted	6500K	25000	4.65	DIM,DL	6
100 Watt Equivalent Non Dimmable												
80935-SU	A19/LED/14W/27K/3PK	14	100	1500	107	80	Frosted	4000K	15000	4.70	DL	6
80937-SU	A19/LED/14W/30K/3PK	14	100	1500	107	80	Frosted	3000K	15000	4.70	DL,EXF	6
80936-SU	A19/LED/14W/40K/3PK	14	100	1500	107	80	Frosted	4000K	15000	4.70	DL	6
80938-SU	A19/LED/14W/50K/3PK	14	100	1500	107	80	Frosted	5000K	15000	4.70	DL,EXF	6
80939-SU	A19/LED/14W/65K/3PK	14	100	1500	107	80	Frosted	6500K	15000	4.70	DL,EXF	6

A19 General Purpose Lamps

Filament Style

120 Volts
Medium Screw (E26)
Glass



Clear



Silver Bowl

Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
40 Watt Equivalent												
80476-SU	A19/LED/FS/6W/22K	6	40	600	100	80	Clear	2200K	15000	4.25	DIM,WL,EXF,WILD	6
80192-SU	A19/LED/FS/5.5W/30K	5.5	40	600	109	80	Clear	3000K	15000	4.25	DIM	6
60 Watt Equivalent												
80744-SU	A19/LED/FS/7.6W/927	7.6	60	800	105	90	Clear	2700K	15000	4.72	DIM,DL,EXF	6
80745-SU	A19/LED/FS/7.6W/950	7.6	60	800	105	90	Clear	5000K	15000	4.72	DIM,DL,EXF	6
Silver Bowl												
80497-SU	A19/LED/FS/SB/6W/D/CL/22K	6	40	540	90	90	Silver Bowl	2200K	25000	4.25	DIM	6
80509-SU	A19/LED/FS/SB/6W/27K	6	40	540	90	90	Silver Bowl	2700K	25000	4.25	DIM	6

A19 General Purpose Colored

Filament Style

120 Volts
Medium Screw (E26)
Glass



Green

Yellow

Red

Orange

Purple



Blue

Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
Transparent Color Lamp 2 Packs												
81080-SU	A19/LED/FS/4.5W/TB/2PK	4.5	-	55	12	-	Glass	Blue	15000	4	DIM,DL,EXF	3
81083-SU	A19/LED/FS/4.5W/TG/2PK	4.5	-	130	29	-	Glass	Green	15000	4	DIM,DL,EXF	3
81085-SU	A19/LED/FS/4.5W/TO/2PK	4.5	-	250	56	-	Glass	Orange	15000	4	DIM,DL,EXF	3
81081-SU	A19/LED/FS/4.5W/TP/2PK	4.5	-	83	18	-	Glass	Purple	15000	4	DIM,DL,EXF	3
81084-SU	A19/LED/FS/4.5W/TY/2PK	4.5	-	420	93	-	Glass	Yellow	15000	4	DIM,DL,EXF	3
81082-SU	A19/LED/FS/4.5W/TR/2PK	4.5	-	33	7	-	Glass	Red	15000	4	DIM,DL,EXF	3
Transparent Color Lamp 6 Packs												
40940-SU	A19/LED/FS/4.5W/TB/6PK	4.5	-	55	12	-	Glass	Blue	15000	4	DIM,DL	4
40941-SU	A19/LED/FS/4.5W/TG/6PK	4.5	-	130	29	-	Glass	Green	15000	4	DIM,DL	4
40944-SU	A19/LED/FS/4.5W/TO/6PK	4.5	-	250	56	-	Glass	Orange	15000	4	DIM,DL	4
40945-SU	A19/LED/FS/4.5W/TP/6PK	4.5	-	83	18	-	Glass	Purple	15000	4	DIM,DL	4
40943-SU	A19/LED/FS/4.5W/TR/6PK	4.5	-	33	7	-	Glass	Red	15000	4	DIM,DL	4

A19 General Purpose Colored

Party & Decorative

120 Volts
Medium Screw (E26)



Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
Frosted Color Lamp												
80145-SU	A19/3W/B/LED	3	-	-	-	-	Frosted	Blue	25000	4.27	DL	6
80146-SU	A19/3W/G/LED	3	-	-	-	-	Frosted	Green	25000	4.27	DL	6
80147-SU	A19/3W/O/LED	3	-	-	-	-	Frosted	Orange	25000	4.27	DL,WILD	6
80168-SU	A19/3W/P/LED	3	-	-	-	-	Frosted	Pink	25000	4.27	DL	6
80148-SU	A19/3W/R/LED	3	-	-	-	-	Frosted	Red	25000	4.27	DL,WILD	6
80144-SU	A19/3W/Y/LED	3	-	-	-	-	Frosted	Yellow	15000	4.27	DL	6
80132-SU	A19/3W/PR/LED	3	-	-	-	-	Frosted	Purple	15000	4.27	DL	6
Frosted Color Lamp 3 Packs												
40450-SU	A19/3W/B/LED/3PK	3	-	-	-	-	Frosted	Blue	25000	4.27	DL	6
40451-SU	A19/3W/G/LED/3PK	3	-	-	-	-	Frosted	Green	25000	4.27	DL	6
40452-SU	A19/3W/O/LED/3PK	3	-	-	-	-	Frosted	Orange	25000	4.27	DL	6
40454-SU	A19/3W/R/LED/3PK	3	-	-	-	-	Frosted	Red	25000	4.27	DL	6
41527-SU	A19/3W/PR/LED/3PK	3	-	-	-	-	Frosted	Purple	15000	4.27	DL	6

A19 UV Black Lights

Party & Decorative

120 Volts
Medium Screw (E26)



Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
UV Black Lamp												
80114-SU	A19/LED/2W/BLB	2	-	365nm	-	-	Clear	UV Black Light	10000	4.21		6
80098-SU	A19/LED/7W/BLB/3PK	7	-	405nm	-	-	Clear	UV Black Light	15000		DL	6

BLACK LIGHTS

365nm LED

Identification & monetary validation. Forensic Investigations.

Special effects, art illumination, UV painting, Halloween parties.

Night clubs, bars lighting, and other entertainment venues

Sunlite's LED Blacklight emits UV-A light at the sweet spot of 365nm thus ensuring only surfaces that fluoresce will illuminate. This combined with the low power consumption of LED technology and being maintenance free due to its long life makes this the ideal bulb to install wherever true UV-A light is needed.

A19 Omni General Purpose Lamps

GU24 Base



version is available

120 Volts
Twist & Lock (GU24)



Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
60 Watt Equivalent Twist & Lock (GU24)												
87973-SU	A19/GU24/LED/10W/CRI90/27K	10	60	800	80	90	Frosted	2700K	25000	4.13	DIM,DL,T20,ES	6
87976-SU	A19/GU24/LED/10W/930	10	60	800	80	92	Frosted	3000K	25000	4.13	DIM,DL,T20,ES	6
87974-SU	A19/GU24/LED/10W/CRI90/40K	10	60	800	80	90	Frosted	4000K	25000	4.13	DIM,DL,T20,ES	6
87975-SU	A19/GU24/LED/10W/CRI90/50K	10	60	800	80	90	Frosted	5000K	25000	4.13	DIM,DL,T20,ES	6
75 Watt Equivalent Twist & Lock (GU24)												
88254-SU	A19/GU24/LED/12W/27K	12	75	1100	92	80	Frosted	2700K	25000	4.13	DIM,DL,ES	6
82100-SU	A19/GU24/LED/12W/930K	12	75	1100	92	90	Frosted	3000K	25000	4.13	DIM,DL	6
88255-SU	A19/GU24/LED/12W/40K	12	75	1100	92	80	Frosted	4000K	25000	4.13	DIM,DL,ES	6
88256-SU	A19/GU24/LED/12W/50K	12	75	1100	92	80	Frosted	5000K	25000	4.13	DIM,DL,ES	6
100 Watt Equivalent Twist & Lock (GU24)												
88257-SU	A19/GU24/LED/14W/27K	14	100	1500	107	80	Frosted	2700K	15000	4.13	DIM,DL	6
82101-SU	A19/GU24/LED/14W/930K	14	100	1500	107	90	Frosted	3000K	25000	4.13	DIM,DL	12
88258-SU	A19/GU24/LED/14W/40K	14	100	1500	107	80	Frosted	4000K	15000	4.13	DIM,DL	6
88259-SU	A19/GU24/LED/14W/50K	14	100	1500	107	80	Frosted	5000K	15000	4.13	DIM,DL	6

Dusk To Dawn Lamps

A19

120 Volts
Medium Screw (E26)



Built-in Photocell Sensor

Automatically on at dusk when ambient brightness is lower than 15 lux, automatically off at dawn when ambient brightness is higher than 30 lux.

Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
60 Watt Equivalent Non Dimmable												
70318-SU	A19/LED/DTD/9W/30K	9	60	800	89	80	Frosted	3000K	15000	4.42	DL,EXF	6
70319-SU	A19/LED/DTD/9W/50K	9	60	800	89	80	Frosted	5000K	15000	4.42	DL,EXF	6

Shabbulb Lamps

Sunlite Exclusive

110-240 Volts
Medium Screw (E26)




Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
Shabbulb												
81140-SU	A19/LED/7W/SHAB/E27/30K	7	40	450	64	80	Frosted	3000K	10000	4.52	DL	12
80949-SU	A19/LED/7W/SHAB/E27/40K	7	40	550	79	80	Frosted	3000K	40000	4.52	DL	12

Blinker Lamps

Sunlite Exclusive

120 Volts
Medium Screw (E26)

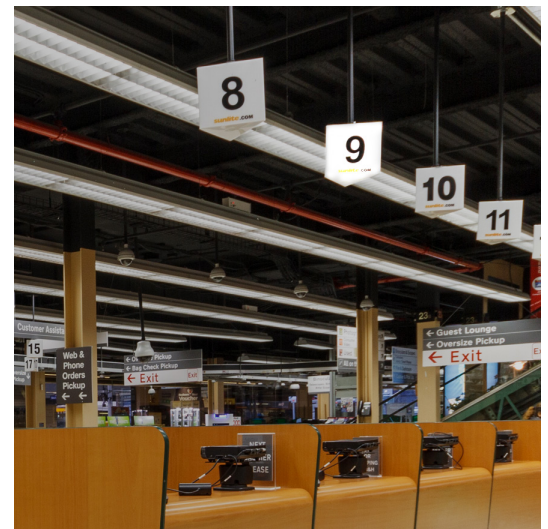

Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
Blinker												
80204-SU	A19/LED/5W/BL/WW	5	40	500	100	80	Frosted	3000K	25000	4.33	Blinker	12

3 Way Lamps

A19 & A21

120 Volts
Medium Screw (E26)



Work with 3-way lamp socket



Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
5W-9W-15W												
70323-SU	A19/LED/3WAY/5W-15/30K	5W/9W /15W	40W/60W /100W	500/1000 /1600	100	80	Frosted	3000K	15000	4.59	DL	6
70324-SU	A19/LED/3WAY/5W-15/40K	5W/9W /15W	40W/60W /100W	500/1000 /1600	100	80	Frosted	4000K	15000	4.59	DL	6
70326-SU	A19/LED/3WAY/5W-15/50K	5W/9W /15W	40W/60W /100W	500/1000 /1600	100	80	Frosted	5000K	15000	4.59	DL	6
6W-12W-19W												
70327-SU	A21/LED/3WAY/6W-19W/30K	6W/12W /19W	60W/75W /125W	800/1500 /2100	133	80	Frosted	3000K	15000	5.28	DIM,DL,EXF	6
70328-SU	A21/LED/3WAY/6W-19W/40K	6W/12W /19W	60W/75W /125W	800/1500 /2100	133	80	Frosted	4000K	15000	5.28	DIM,DL,EXF	6
70329-SU	A21/LED/3WAY/6W-19W/50K	6W/12W /19W	60W/75W /125W	800/1500 /2100	133	80	Frosted	5000K	15000	5.28	DIM,DL,EXF	6

High Lumen A Bulb

A21 & A23



version is available

120 Volts
Medium Screw (E26)



Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
150 Watt Equivalent Dimmable												
80995-SU	A21/LED/18W/27K	18	150	2600	144	80	Frosted	2700K	11000	2.68	DIM,DL	6
80996-SU	A21/LED/18W/30K	18	150	2600	144	80	Frosted	3000K	11000	2.68	DIM,DL	6
80997-SU	A21/LED/18W/40K	18	150	2600	144	80	Frosted	4000K	11000	2.68	DIM,DL	6
80998-SU	A21/LED/18W/50K	18	150	2600	144	80	Frosted	5000K	11000	2.68	DIM,DL	6
150 Watt Equivalent Multi Volt Non Dimmable												
82105-SU	A21/LED/20W/MV/30K	20	150	2550	128	80	Frosted	3000K	25000	5.12	DL	6
82106-SU	A21/LED/20W/MV/40K	20	150	2550	128	80	Frosted	4000K	25000	5.12	DL	6
82107-SU	A21/LED/20W/MV/50K	20	150	2550	128	80	Frosted	5000K	25000	5.12	DL	6
300 Watt Equivalent Multi Volt Non Dimmable												
82108-SU	A23/LED/26W/MV/30K	26	300	4000	154	80	Frosted	3000K	25000	6.5	DL	6
82109-SU	A23/LED/26W/MV/40K	26	300	4000	154	80	Frosted	4000K	25000	6.5	DL	6

Appliance Bulbs

40 Watt Equivalent



version is available

120 Volts
90 CRI



E26 | Clear

E12 | Clear

E17 | Frosted

Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
Medium Screw (E26)												
81068-SU	S11/LED/FR/1W/27K/E26	1	10	50	50	80	Frosted	2700K	15000	2	DL	6
88378-SU	A15/LED/6W/D/E/FR/27K	6	40	480	80	82	Frosted	2700K	25000	3.39	DIM,DL,EXF,Ja8,ES	6
80175-SU	A15/LED/6W/D/E/FR/30K	6	40	480	80	82	Frosted	3000K	25000	3.39	DIM,DL,EXF,ES	6
80218-SU	A15/LED/6W/D/E/FR/40K	6	40	480	80	82	Frosted	4000K	25000	3.39	DIM,DL,EXF,ES	6
80224-SU	A15/LED/6W/D/E/FR/50K	6	40	480	80	84	Frosted	5000K	25000	3.39	DIM,DL,EXF,ES	6
Medium Screw (E26) 90 CRI												
80133-SU	A15/LED/6W/930	6	40	450	75	90	Clear	3000K	15000	3.26	DIM,DL,EXF,T20	6
80137-SU	A15/LED/6W/940	6	40	450	75	90	Clear	4000K	15000	3.26	DIM,DL,T20	6
80138-SU	A15/LED/6W/950	6	40	450	75	90	Clear	5000K	15000	3.26	DIM,DL,T20	6
Candelabra Screw (E12)												
80135-SU	A15/LED/6W/930	6	40	450	75	90	Clear	3000K	15000	3.26	DIM,DL,T20	6
Intermediate Screw (E17)												
80335-SU	A15/LED/6W/E17/D/FR/27K	6	40	480	80	85	Frosted	2700K	15000	3.54	DIM,DL	6
80334-SU	A15/LED/6W/E17/D/FR/30K	6	40	480	80	85	Frosted	3000K	15000	3.54	DIM,DL	6
41409-SU	A15/LED/6W/E17/D/FR/30K/6PK	6	40	480	80	80	Frosted	3000K	15000	3.49	DIM,DL	12
80337-SU	A15/LED/6W/E17/D/FR/40K	6	40	480	80	85	Frosted	4000K	15000	3.54	DIM,DL	6

Globe Decorative Lamps

G16 | G16.5 | G25



version is available

120 Volts
Medium Screw (E26) / Candelabra Screw (E12)



3 Pack Box



G16



G16.5



G25

Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
G16 Medium Screw (E26) 40 Watt Eq. W												
40285-SU	G16/LED/5W/E26/D/CL/E/27K/3PK	5	40	350	70	82	Clear	2700K	25000	2.83	DIM,DL,ES	6
40287-SU	G16/LED/5W/E26/D/FR/ES/27K/3PK	5	40	350	70	82	Frosted	2700K	25000	2.83	DIM,DL	6
41892-SU	G16/LED/5W/CL/30K/6PK	5	40	350	70	80	Clear	3000K	15000	2.95	DIM,DL	6
41894-SU	G16/LED/5W/FR/30K/6PK	5	40	350	70	80	Frosted	3000K	15000	2.91	DIM,DL	6
41893-SU	G16/LED/5W/CL/40K/6PK	5	40	350	70	80	Clear	4000K	15000	2.95	DIM,DL	6
41895-SU	G16/LED/5W/FR/40K/6PK	5	40	350	70	80	Frosted	4000K	15000	2.91	DIM,DL	6
G16 Medium Screw (E26) 60 Watt Eq. W												
40289-SU	G16/LED/7W/D/E26/CL/ES/27K/3PK	7	60	500	71	82	Clear	2700K	25000	3.25	DIM,ES	6
40291-SU	G16/LED/7W/D/E26/FR/ES/27K/3PK	7	60	500	71	82	Frosted	2700K	25000	3.25	DIM	6
40292-SU	G16/LED/7W/D/E26/FR/ES/27K/6PK	7	60	500	71	82	Frosted	2700K	25000	3.25	DIM	12
41896-SU	G16/LED/7W/CL/30K/6PK	7	60	500	71	80	Clear	3000K	15000	3.15	DIM,DL	6
41898-SU	G16/LED/7W/FR/30K/6PK	7	60	500	71	80	Frosted	3000K	15000	3.25	DIM,DL	6
41897-SU	G16/LED/7W/CL/40K/6PK	7	60	500	71	80	Clear	4000K	15000	3.15	DIM,DL	6
41899-SU	G16/LED/7W/FR/40K/6PK	7	60	500	71	80	Frosted	4000K	25000	3.15	DIM,DL	6
G16.5 Candelabra Screw (E12) 40 Watt Eq. W												
40293-SU	G16.5/LED/5W/D/E12/CL/ES/27K/3PK	5	40	350	70	82	Clear	2700K	25000	2.91	DIM,ES	6
40294-SU	G16.5/LED/5W/D/E12/CL/ES/27K/6PK	5	40	350	70	82	Clear	2700K	25000	2.91	DIM,ES	12
40295-SU	G16.5/LED/5W/D/E12/FR/ES/27K/3PK	5	40	350	70	82	Frosted	2700K	25000	2.91	DIM,WL,ES	6
40296-SU	G16.5/LED/5W/D/E12/FR/ES/27K/6PK	5	40	350	70	82	Frosted	2700K	25000	2.91	DIM,WL,ES	12
82041-SU	G16.5/LED/5W/CRI90/E12/FR/D/E/30K/6PK	5	40	350	70	90	Frost	3000K	25000	2.95	DIM,DL,T20,ES	12
82040-SU	G16.5/LED/5W/CRI90/E12/CL/D/E/30K/6PK	5	40	350	70	90	Clear	3000K	25000	2.95	DIM,DL,T20,ES	12
G16.5 Candelabra Screw (E12) 60 Watt Eq. W												
40297-SU	G16.5/LED/7W/D/E12/CL/E/27K/3PK	7	60	500	71	82	Clear	2700K	25000	2.91	DIM,ES	6
40299-SU	G16.5/LED/7W/D/E12/FR/E/27K/3PK	7	60	500	71	82	Frosted	2700K	25000	2.91	DIM,ES	6
40306-SU	G16.5/LED/7W/D/E12/FR/E/27K/6PK	7	60	500	71	82	Frosted	2700K	25000	2.91	DIM,ES	12
41888-SU	G16.5/LED/7W/CL/30K/6PK	7	60	500	71	80	Clear	3000K	15000	3.03	DIM,DL	6
41890-SU	G16.5/LED/7W/FR/30K/6PK	7	60	500	71	80	Frosted	3000K	15000	3.03	DIM,DL	6
41889-SU	G16.5/LED/7W/CL/40K/6PK	7	60	500	71	80	Clear	4000K	15000	3.03	DIM,DL	6
41891-SU	G16.5/LED/7W/FR/40K/6PK	7	60	500	71	80	Frosted	4000K	15000	3.03	DIM,DL	6
G25 Medium Screw (E26) 60 Watt Eq. W												
80671-SU	G25/LED/7W/D/CL/ES/27K	7	60	500	71	82	Clear	2700K	25000	4.41	DIM,ES	6
80727-SU	G25/LED/6W/927	6	60	520	87	90	Frosted	2700K	25000	4.53	DIM,DL,EXF,T20,ES	6
80694-SU	G25/LED/6W/930	6	60	520	87	90	Frosted	3000K	25000	4.53	DIM,DL,EXF,T20,ES	6
80712-SU	G25/LED/6W/940	6	60	520	87	90	Frosted	4000K	25000	4.53	DIM,DL,EXF,T20,ES	6
80715-SU	G25/LED/6W/950	6	60	520	87	90	Frosted	5000K	25000	4.53	DIM,DL,EXF,T20,ES	6

Globe Decorative Lamps

Filament Style



version is available

120 Volts
Medium Screw (E26) / Candelabra Screw (E12)



Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
G16 Medium Screw (E26)												
80454-SU	G16/LED/FS/3W/E26/D/CL/22K	3	25	250	83	85	Clear	2200K	15000	2.95	DIM	6
40963-SU	G16/LED/FS/3W/E26/D/CL/27K/6PK	3	25	250	83	85	Clear	2700K	15000	3.35	DIM	12
G16.5 Candelabra Screw (E12)												
40959-SU	G16.5/LED/FS/2.5W/E12/D/CL/30K/6PK	2.5	25	250	100	85	Clear	3000K	15000	3.35	DIM,DL,EXF	12
41617-SU	G16.5/LED/FS/2.5W/50K/6PK	2.5	25	250	100	85	Clear	5000K	15000	3.35	DIM,DL	12
41547-SU	G16.5/LED/FS/5W/E12/CL/30K/6PK	5	60	500	100	85	Clear	3000K	15000	3.35	DIM,DL	12
81145-SU	G16.5/LED/FS/6W/930/6PK	6	60	500	83	91	Clear	3000K	15000	3.35	DIM,WL,EXF,T20,ES	12
80789-SU	G16.5/LED/FS/5W/E12/CL/50K	5	60	500	100	85	Clear	5000K	15000	3.35	DIM,DL,EXF	6
41548-SU	G16.5/LED/FS/5W/E12/CL/50K/6PK	5	60	500	100	85	Clear	5000K	15000	3.35	DIM,DL	12
G25 Medium Screw (E26)												
81229-SU	G25/LED/FS/8.5W/922	8.5	100	800	94	90	Clear	2200K	15000	4.65	DIM,WL,EXF,T20	6
80494-SU	G25/LED/FS/SB/6W/D/CL/27K	6	60	530	88	85	Silver Bowl	2700K	15000	4.52	DIM,T20	6
81124-SU	G25/LED/FS/8.5W/927	8.5	100	800	94	90	Clear	2700K	15000	4.65	DIM,DL,T20	6
81236-SU	G25/LED/FS/7.6W/940	7.6	100	800	105	90	Clear	4000K	15000	4.72	DIM,DL	6
81237-SU	G25/LED/FS/7.6W/950	7.6	100	800	105	90	Clear	5000K	15000	4.72	DIM,DL	6
G30 Medium Screw (E26)												
80999-SU	G30/LED/FS/8.5W/922	8.5	100	800	94	90	Clear	2200K	15000	5.51	DIM,WL,EXF	6
81099-SU	G30/LED/FS/8.5W/927	8.5	100	800	94	90	Clear	2700K	15000	5.51	DIM,DL,EXF	6
G40 Medium Screw (E26)												
81139-SU	G40/LED/FS/8.5W/922	8.5	100	800	94	90	Clear	2200K	15000	6.7	DIM,DL,T20	6
81122-SU	G40/LED/FS/8.5W/927	8.5	100	800	94	90	Clear	2700K	15000	6.7	DIM,DL,T20	6
G40 Medium Screw (E26) Silver Bowl												
41605-SU	G40/LED/FS/SB/7W/CL/27K/3PK	7	75	600	86	90	Silver Bowl	2700K	15000	6.69	DIM,DL	6

Chandelier Decorative Lamps

Chandelier



version is available

120 Volts

Medium Screw (E26) / Candelabra Screw (E12)



Clear



Frosted



Flame Tip (E12)



Torpedo Tip (E26)

Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
Torpedo Tip Candelabra Screw (E12) 40 Eq.W												
80754-SU	CTC/LED/4.5W/927	4.5	40	300	67	94	Clear	2700K	25000	3.86	DIM,T20,ES	6
80796-SU	CTF/LED/4.5W/927	4.5	40	300	67	90	Frosted	2700K	25000	3.86	DIM,DL,T20,ES	6
80769-SU	CTC/LED/4.5W/30K	4.5	40	300	67	83	Clear	3000K	15000	3.86	DIM,DL,ES	6
41640-SU	CTF/LED/4.5W/30K/6PK	4.5	40	300	67	83	Frosted	3000K	15000	3.86	DIM,DL,ES	6
80775-SU	CTC/LED/4.5W/40K	4.5	40	300	67	85	Clear	4000K	15000	3.86	DIM,DL,ES	6
80779-SU	CTF/LED/4.5W/40K	4.5	40	300	67	84	Frosted	4000K	15000	3.86	DIM,DL,ES	6
80777-SU	CTC/LED/4.5W/50K	4.5	40	300	67	84	Clear	5000K	15000	3.86	DIM,DL,ES	6
80781-SU	CTF/LED/4.5W/50K	4.5	40	300	67	84	Frosted	5000K	15000	3.86	DIM,DL,ES	6
Torpedo Tip European (E14)												
81486-SU	CTC/LED/5W/E14/CL/27K	5	40	470	94	80	Clear	2700K	25000	4.13	DIM	6
81485-SU	CTF/LED/5W/E14/FR/27K	5	40	470	94	80	Frosted	2700K	25000	4.13	DIM	6
Torpedo Tip Candelabra Screw (E12) 60 Eq.W												
80982-SU	CTC/LED/7W/927	7	60	500	71	90	Clear	2700K	15000	4.25	DIM,DL,T20,ES	6
80406-SU	CTF/LED/7W/927/6PK	7	60	500	71	94	Frosted	2700K	25000	4.25	DIM,T20,ES	12
80782-SU	CTC/LED/7W/30K	7	60	500	71	80	Clear	3000K	15000	4.25	DIM,DL,ES	6
80786-SU	CTF/LED/7W/30K	7	60	500	71	83	Frosted	3000K	15000	4.25	DIM,DL,ES	6
80783-SU	CTC/LED/7W/40K	7	60	500	71	80	Clear	4000K	15000	4.25	DIM,DL,ES	6
80787-SU	CTF/LED/7W/40K	7	60	500	71	82	Frosted	4000K	15000	4.25	DIM,DL,ES	6
41645-SU	CTC/LED/7W/50K/6PK	7	60	500	71	80	Clear	5000K	15000	4.25	DIM,DL,ES	6
80791-SU	CTF/LED/7W/50K	7	60	500	71	83	Frosted	5000K	15000	4.25	DIM,DL,ES	6
Torpedo Tip Medium Screw (E26) 40 Eq.W												
80984-SU	ETC/LED/4.5W/927	4.5	40	300	67	90	Frosted	2700K	15000	3.82	DIM,DL,T20,ES	6
40230-SU	ETF/LED/4.5W/27K/6PK	4.5	40	300	67	80	Frosted	2700K	25000	3.82	DIM,DL,ES	6
Torpedo Tip Medium Screw (E26) 60 Eq.W												
41614-SU	ETC/LED/7W/927/6PK	7	60	500	71	94	Clear	2700K	15000	4.21	DIM,DL,T20,ES	6
41380-SU	ETF/LED/7W/E26/FR/D/ES/27K/6PK	7	60	500	71	80	Frosted	2700K	25000	4.21	DIM,DL,ES	6
41775-SU	ETC/LED/7W/930/6PK	7	60	500	71	90	Clear	3000K	15000	4.21	DIM,DL,T20,ES	6
41772-SU	ETF/LED/7W/930/6PK	7	60	500	71	90	Frosted	3000K	25000	4.21	DIM,DL,T20,ES	6
41776-SU	ETC/LED/7W/940/6PK	7	60	500	71	90	Clear	4000K	15000	4.21	DIM,DL,T20,ES	6
41773-SU	ETF/LED/7W/940/6PK	7	60	500	71	90	Frosted	4000K	25000	4.21	DIM,DL,T20,ES	6
41777-SU	ETC/LED/7W/950/6PK	7	60	500	71	90	Clear	5000K	15000	4.21	DIM,DL,T20,ES	6
41774-SU	ETF/LED/7W/950/6PK	7	60	500	71	90	Frosted	5000K	25000	4.21	DIM,DL,T20,ES	6
Flame Tip Candelabra Screw (E12)												
80755-SU	CFC/LED/4.5W/927	4.5	40	300	67	94	Clear	2700K	25000	3.98	DIM,DL,T20,ES	6
80983-SU	CFC/LED/7W/927	7	60	500	71	90	Frosted	2700K	15000	4.48	DIM,T20,ES	6
Flame Tip Medium Screw (E26)												
80797-SU	EFC/LED/7W/927K	7	60	500	71	94	Clear	2700K	25000	4.45	DIM,DL,T20,ES	6

Chandelier Decorative Lamps

Filament Style



version is available

120 Volts

Medium Screw (E26) / Candelabra Screw (E12)



CTC



CFC



ETC



EFC

Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
Torpedo Tip 40 Watt Equivalent												
80452-SU	CTC/LED/FS/4W/18K	4	40	400	100	80	Clear	1800K	15000	3.85	DIM,DL,EXF	6
80663-SU	CTC/LED/FS/4W/E12/D/CL/27K	4	40	400	100	80	Clear	2700K	15000	3.85	DIM,DL	6
80661-SU	CTC/LED/FS/5W/E12/D/CL/27K	5	60	600	120	80	Clear	2700K	15000	3.85	DIM,DL,T20	6
81102-SU	CTC/LED/FS/5W/E12/D/CL/30K	5	60	600	120	80	Clear	3000K	15000	3.85	DIM,T20	6
40956-SU	CTC/LED/FS/5.5W/30K/6PK	5	60	600	120	90	Clear	3000K	15000	3.85	DIM,T20	6
81101-SU	CTC/LED/FS/5.5W/E12/D/CL/40K	5.5	60	600	109	90	Clear	4000K	15000	3.85	DIM,DL,T20	6
81129-SU	CTC/LED/FS/5.5W/E12/D/CL/50K	5.5	60	600	109	90	Clear	5000K	15000	3.85	DIM,DL,T20	6
Torpedo Tip 60 Watt Equivalent 220-277 Volt												
40302-SU	CTC/LED/FS/5W/27K/6PK	5	60	630	126	90	Clear	2700K	15000	3.86	DL	12
Torpedo Tip 75 Watt Equivalent												
81336-SU	CTC/LED/FS/8.8W/E12/CL/27K	8.8	75	800	91	90	Clear	2700K	15000	3.77	DIM,WL,EXF,T20	12
81337-SU	CTC/LED/FS/8.8W/E12/CL/30K	8.8	75	800	91	90	Clear	3000K	15000	3.77	DIM,WL,EXF,T20	12
81339-SU	CTC/LED/FS/8.8W/E12/CL/40K	8.8	75	800	91	90	Clear	4000K	15000	3.77	DIM,WL,T20	12
81338-SU	CTC/LED/FS/8.8W/E12/CL/50K	8.8	75	800	91	90	Clear	5000K	15000	3.77	DIM,WL,EXF,T20	12
Flame Tip Candelabra Screw (E12)												
80447-SU	CFC/LED/FS/4W/E12/D/CL/18K	4	25	250	63	80	Clear	1800K	15000	4.65	DIM	6
80679-SU	CFC/LED/FS/4W/27K	4	40	400	100	80	Clear	2700K	15000	4.65	DIM,DL	6
80662-SU	CFC/LED/FS/5W/E12/D/CL/27K	5	60	600	120	80	Clear	2700K	15000	4.65	DIM,DL	6
Torpedo Tip Medium Screw (E26)												
80658-SU	ETC/LED/FS/5.5W/E26/D/CL/27K	5.5	60	600	109	90	Clear	2700K	15000	3.42	DIM,T20	6
81106-SU	ETC/LED/FS/5.5W/E26/D/CL/50K	5.5	60	600	109	90	Clear	5000K	15000	3.42	DIM,DL,T20	6
Flame Tip Candelabra Screw (E12)												
81204-SU	CFC/LED/FS/5W/E12/D/CL/30K	5.5	60	600	109	90	Clear	3000K	15000	4.25	DIM,DL,EXF	6
81107-SU	CFC/LED/FS/5W/E12/D/CL/40K	5	60	600	120	90	Clear	4000K	15000	4.28	DIM,DL,EXF,T20	6
80674-SU	CFC/LED/FS/5W/E12/D/CL/50K	5	60	650	130	80	Clear	5000K	15000	3.86	DIM,DL	6



Reflector Lamps

Flood Light

120 Volts

Intermediate Screw (E17) / Medium Screw (E26)



Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (m)	Features	CTN
R14 Intermediate Screw (E17)												
80430-SU	R14/LED/N/E17/4W/D/E/27K	4	25	280	70	82	Frosted	2700K	25000	2.5	DIM,ES	6
40456-SU	R14/LED/N/E17/4W/D/27K/3PK	4	25	280	70	80	Frosted	2700K	25000	2.5	DIM,DL	6
80425-SU	R14/LED/N/E17/4W/30K	4	25	250	63	80	Frosted	3000K	25000	2.5	DIM,DL	6
80435-SU	R14/LED/N/E17/4W/30K/3PK	4	25	250	63	80	Frosted	3000K	25000	2.5	DIM,DL	6
R14 Medium Screw (E26)												
80431-SU	R14/LED/E26/4W/D/27K	4	25	250	63	80	Frosted	2700K	25000	2.17	DIM	6
40457-SU	R14/LED/E26/4W/D/27K/3PK	4	25	250	63	80	Frosted	2700K	25000	2.17	DIM	6
80557-SU	R14/LED/E26/4W/30K	4	25	250	63	80	Frosted	3000K	25000	2.17	DIM,DL	6
80434-SU	R14/LED/E26/4W/30K/3PK	4	25	250	63	80	Frosted	3000K	25000	2.17	DIM,DL	6
R20 Medium Screw (E26)												
81437-SU	R20/LED/8W/CRI90/27K	8	50	525	66	90	Frosted	2700K	25000	3.78	DIM,DL,T20,ES	6
81438-SU	R20/LED/8W/CRI90/30K	8	50	525	66	90	Frosted	3000K	25000	3.78	DIM,WL,EXF,T20,ES	6
81439-SU	R20/LED/8W/CRI90/40K	8	50	525	66	90	Frosted	4000K	25000	3.78	DIM,DL,T20,ES	6
81393-SU	R20/LED/8W/CRI90/50K	8	50	525	66	90	Frosted	5000K	25000	3.78	DIM,DL,T20,ES	6
BR30 Medium Screw (E26)												
81394-SU	BR30/LED/10.5W/27K	10.5	65	800	76	80	Frosted	3000K	25000	5.16	DIM,DL,ES	6
81396-SU	BR30/LED/10.5W/40K	10.5	65	800	76	80	Frosted	4000K	25000	5.16	DIM,DL,ES	6
81397-SU	BR30/LED/10.5W/50K	10.5	65	800	76	80	Frosted	5000K	25000	5.16	DIM,DL,ES	6
81398-SU	BR30/LED/10.5W/65K	10.5	65	800	76	80	Frosted	6500K	25000	5.16	DIM,DL	6
BR30 Medium Screw (E26) 90 CRI												
81366-SU	BR30/LED/11W/927	11	65	920	84	94	Frosted	2700K	25000	5	DIM,DL,EXF,T20,ES	6
81367-SU	BR30/LED/11W/930	11	65	920	84	94	Frosted	3000K	25000	5	DIM,DL,EXF,T20,ES	6
81368-SU	BR30/LED/11W/940	11	65	920	84	95	Frosted	4000K	25000	5	DIM,DL,EXF,T20,ES	6
81369-SU	BR30/LED/11W/950	11	65	920	84	96	Frosted	5000K	25000	5	DIM,DL,EXF,T20,ES	6
BR40 Medium Screw (E26)												
81332-SU	BR40/LED/13W/30K	13	75	1100	85	80	Frosted	3000K	25000	5.39	DIM,DL,EXF,ES	6
81333-SU	BR40/LED/13W/40K	13	75	1100	85	80	Frosted	4000K	25000	5.39	DIM,DL,EXF,ES	6
81335-SU	BR40/LED/13W/65K	13	75	1100	85	80	Frosted	6500K	25000	5.39	DIM,DL	6
BR40 Medium Screw (E26) 90 CRI												
81488-SU	BR40/LED/12W/930	12	85	1150	96	90	Frosted	3000K	25000	5.39	DIM,DL,EXF	6
81489-SU	BR40/LED/12W/940	12	85	1150	96	90	Frosted	4000K	25000	5.39	DIM,DL,EXF	6
81490-SU	BR40/LED/12W/950	12	85	1150	96	90	Frosted	5000K	25000	5.39	DIM,DL,EXF,T20	6



PAR38



PAR30



PAR20



PAR16

Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
PAR16 Medium Screw (E26)												
80124-SU	PAR16/LED/7W/D/E/27K	7	75	500	71	80	Frosted	2700K	25000	3.03	DIM,ES	6
40385-SU	PAR16/LED/7W/D/E/27K/6PK	7	75	500	71	80	Frosted	2700K	25000	3.03	DIM	12
41568-SU	PAR16/LED/7W/50K/6PK	7	50	550	79	80	Frosted	5000K	25000	3.03	DIM,DL	12
PAR16 Medium Screw (E26) 90 CRI												
80553-SU	PAR16/LED/6W/927	6	50	500	83	93	Frosted	2700K	25000	2.93	DIM,DL,T20,ES	6
80546-SU	PAR16/LED/6W/930	6	50	500	83	94	Frosted	3000K	25000	2.93	DIM,T20,ES	6
80547-SU	PAR16/LED/6W/940	6	50	500	83	90	Frosted	4000K	25000	2.93	DIM,DL,T20,ES	6
80551-SU	PAR16/LED/6W/950	6	50	500	83	96	Frosted	5000K	25000	2.93	DIM,DL,T20,ES	6
PAR20 Medium Screw (E26)												
87930-SU	PAR20/LED/8W/CRI90/27K	8	50	500	63	93	Frosted	2700K	25000	3.78	DIM,WL,T20,Ja8,ES	6
87931-SU	PAR20/LED/8W/CRI90/30K	8	50	500	63	90	Frosted	3000K	25000	3.78	DIM,WL,T20,Ja8,ES	6
87932-SU	PAR20/LED/8W/CRI90/40K	8	50	500	63	94	Frosted	4000K	25000	3.78	DIM,WL,T20,Ja8,ES	6
87933-SU	PAR20/LED/8W/CRI90/50K	8	50	500	63	90	Frosted	5000K	25000	3.78	DIM,WL,T20,ES	6
PAR30 Short Neck												
40979-SU	PAR30/LED/9W/SHORT/FL35/D/E/27K/6PK	9	75	850	94	80	Frosted	2700K	25000	3.44	DIM,DL,ES	6
40980-SU	PAR30/LED/9W/SHORT/FL35/D/E/30K/6PK	9	75	850	94	80	Frosted	3000K	25000	3.44	DIM,DL,ES	6
40981-SU	PAR30/LED/9W/SHORT/FL35/D/E/40K/6PK	9	75	800	89	84	Frosted	4000K	25000	3.44	DIM,WL,EXF,ES	6
80969-SU	PAR30/LED/9W/950	9	75	750	75	90	Frosted	5000K	25000	3.44	DIM,DL,T20,ES	6
40982-SU	PAR30/LED/9W/SHORT/FL35/D/E/50K/6PK	9	75	850	94	80	Frosted	5000K	25000	3.44	DIM,DL,ES	6
PAR30 Short Neck 90 CRI												
80966-SU	PAR30/LED/9W/927	9	75	750	75	90	Frosted	2700K	25000	3.44	DIM,DL,ES	6
41806-SU	PAR30/LED/9W/927/6PK	9	75	750	75	90	Frosted	2700K	25000	3.44	DIM,DL,ES	6
88048-SU	PAR30/LED/10W/FL40/DIM/ES/90/27K	10	75	750	75	90	Frosted	2700K	25000	3.44	DIM,DL	6
80971-SU	PAR30/LED/9W/930	9	75	750	83	94	Frosted	3000K	25000	3.44	T20,ES	6
41809-SU	PAR30/LED/9W/930/6PK	9	75	750	75	90	Frosted	3000K	25000	3.44	DIM,DL,ES	6
80968-SU	PAR30/LED/9W/940	9	75	750	83	86	Frosted	4000K	25000	3.44	T20,ES	6
41807-SU	PAR30/LED/9W/940/6PK	9	75	750	75	90	Frosted	4000K	25000	3.44	DIM,DL,ES	6
80969-SU	PAR30/LED/9W/950	9	75	750	83	84	Frosted	5000K	25000	3.44	T20,ES	6
41808-SU	PAR30/LED/9W/950/6PK	9	75	750	75	90	Frosted	5000K	25000	3.44	DIM,DL,ES	6
PAR30 Long Neck												
80880-SU	PAR30LN/LED/9W/FL35/D/E/27K	9	75	850	94	80	Frosted	2700K	25000	4.39	DIM,DL,ES	6
80942-SU	PAR30LN/LED/9W/FL35/D/E/30K	9	75	850	94	80	Frosted	3000K	25000	4.39	DIM,DL,ES	6
80943-SU	PAR30LN/LED/9W/FL35/D/E/40K	9	75	850	94	84	Frosted	4000K	25000	4.39	DIM,DL,EXF,ES	6
80883-SU	PAR30LN/LED/9W/FL35/D/E/50K	9	75	850	94	80	Frosted	5000K	25000	4.39	DIM,DL,EXF,ES	6
PAR30 Long Neck 90 CRI												
82033-SU	PAR30LN/LED/10W/CRI90/D/E/30K/6PK	10	75	750	75	90	Frosted	3000K	25000	4.41	DIM,DL,T20,ES	6
89008-SU	PAR30LN/LED/10W/FL40/DIM/ES/90/30K	10	75	800	80	90	Frosted	3000K	40000	4.57	DIM,WL	6
PAR38 Long Neck 90 CRI												
88082-SU	PAR38/LED/17W/FL40/DIM/ES/90/27K	17	120	1150	68	90	Frosted	2700K	40000	5.08	DIM,WL	6
87934-SU	PAR38/LED/15W/CRI90/27K	15	100	1200	80	90	Frosted	2700K	25000	5.08	DIM,WL,EXF,T20,Ja8,ES	6
87935-SU	PAR38/LED/15W/CRI90/30K	15	100	1200	80	90	Frosted	3000K	25000	5.08	DIM,WL,EXF,T20,Ja8,ES	6
87936-SU	PAR38/LED/15W/CRI90/40K	15	100	1200	80	90	Frosted	4000K	25000	5.08	DIM,WL,T20,Ja8,ES	6
87937-SU	PAR38/LED/15W/CRI90/50K	15	100	1200	80	90	Frosted	5000K	25000	5.08	DIM,WL,T20,ES	6
87938-SU	PAR38/LED/15W/CRI90/65K	15	100	1200	80	90	Frosted	6500K	25000	5.08	DIM,WL	6

Colored Reflector Lamps

Flood Light

120 Volts
Medium Screw (E26)



Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
PAR20												
81467-SU	PAR20/LED/3W/B	3	-	-	-	-	Blue	Blue	15000	3.48	WL	6
81468-SU	PAR20/LED/3W/G	3	-	-	-	-	Green	Green	15000	3.48	WL	6
40250-SU	PAR20/LED/3W/G/3PK	3	-	-	-	-	Green	Green	15000	3.48	WL	6
81465-SU	PAR20/LED/3W/R	3	-	-	-	-	Red	Red	15000	3.48	WL	6
40247-SU	PAR20/LED/3W/R/3PK	3	-	-	-	-	Red	Red	15000	3.48	WL	6
81466-SU	PAR20/LED/3W/Y	3	-	-	-	-	Yellow	Yellow	15000	3.48	WL	6
81469-SU	PAR20/LED/3W/A	3	-	-	-	-	Amber	1800K	15000	3.48	WL	6
PAR30												
81472-SU	PAR30/LED/8W/B	8	-	-	-	-	Blue	Blue	15000	3.62	WL	6
81473-SU	PAR30/LED/8W/G	8	-	-	-	-	Green	Green	15000	3.62	WL	6
81470-SU	PAR30/LED/8W/R	8	-	-	-	-	Clear	Red	15000	3.62	WL	6
80032-SU	PAR30/LED/3W/R	3	-	-	-	-	Red Cover	Red	30000	3.62		12
81471-SU	PAR30/LED/8W/Y	8	-	-	-	-	Yellow	Yellow	15000	3.62	WL	6
81474-SU	PAR30/LED/8W/A	8	-	-	-	-	Amber	1800K	15000	3.62	WL	6
PAR38												
81477-SU	PAR38/LED/15W/B	15	-	-	-	-	Blue	Blue	15000	5.12	WL	6
81478-SU	PAR38/LED/15W/G	15	-	-	-	-	Green	Green	15000	5.12	WL	6
80555-SU	PAR38/LED/12W/FL35/O	12	-	-	-	-	Orange	Orange	15000	5.12	DL,WILD	6
80043-SU	PAR38/LED/4W/R	4	-	-	-	-	Red	Red	30000	5.27	WILD	6
81475-SU	PAR38/LED/15W/R	15	-	-	-	-	Red	Red	15000	5.12	WL	6
80045-SU	PAR38/LED/4W/Y	4	-	-	-	-	Silver	Yellow	30000	5.27		6
81476-SU	PAR38/LED/15W/Y	15	-	-	-	-	Yellow	Yellow	15000	5.12	WL	6
81479-SU	PAR38/LED/15W/A	15	-	-	-	-	Amber	1800K	15000	5.12	WL	6

MR11 Mini Reflector Lamps

Spotlight Lamps

12 Volts
2-Pin (GU4)



Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
MR11												
81005-SU	MR11/LED/5W/30K	5	35	350	70	80	Frosted	3000K	30000	1.65	DIM	12

Wild = Wildlife Lighting DIM = Dimmable EXF = Suitable for Enclosed Fixtures

DL= Rated for Damp Location WL= Rated for Wet Location ES = Energy Star Ja8 = Title 24 T20 = Title 20

© 2024 Sunshine Lighting. All rights Reserved. products subject to change without notice. We are not responsible for any typographical errors.

MR16 Mini Reflector Lamps

Spotlight Lamps

12 / 120 Volts

2-Pin GU5.3 / Medium Screw (E26)



Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
2-Pin GU5.3 12V												
81118-SU	MR16/LED/6W/12V/FL40/D/E/27K/CRI90	6	50	500	83	90	Frosted	2700K	25000	1.97	DIM,DL,T20,Ja8,ES	6
81119-SU	MR16/LED/6W/12V/FL40/D/E/30K/CRI90	6	50	500	83	93	Frosted	3000K	25000	1.96	DIM,DL,T20,Ja8,ES	6
81120-SU	MR16/LED/7W/12V/FL35/D/E/40K/CRI90	7	50	500	71	90	Frosted	4000K	25000	1.96	DIM,DL,T20,ES	6
81121-SU	MR16/LED/7W/12V/FL35/D/E/50K/CRI90	7	50	500	71	90	Frosted	5000K	25000	1.96	DIM,DL,T20,ES	6
Colored 12V												
80856-SU	MR16/LED/3W/GU5.3/12V/B	3	25	35	12	-	Frosted	Blue	30000	1.96		6
80857-SU	MR16/LED/3W/GU5.3/12V/G	3	25	150	50	-	Frosted	Green	30000	1.96		6
80855-SU	MR16/LED/3W/GU5.3/12V/R	3	25	90	30	-	Frosted	Red	30000	1.96		6
Medium Screw (E26) 120V												
80142-SU	MR16/LED/7W/MED/D/27K	7	60	500	71	80	Frosted	2700K	25000	2.2	DIM	6
40983-SU	MR16/LED/7W/MED/D/27K/6PK	7	50	500	71	80	Frosted	2700K	25000	2.2	DIM	12
45163-SU	MR16/LED/7W/MED/D/30K/6PK	7	60	500	71	80	Frosted	3000K	25000	2.2	DIM,DL	12
80084-SU	MR16/LED/7W/MED/40K	7	60	500	71	80	Frosted	4000K	25000	2.2	DIM,DL	6
45164-SU	MR16/LED/7W/MED/40K/6PK	7	50	550	79	80	Frosted	4000K	25000	2.17	DIM,DL	12
40984-SU	MR16/LED/7W/MED/D/50K/6PK	7	50	500	71	80	Frosted	5000K	25000	2.2	DIM	12
Medium Screw (E26) 120V												
80437-SU	MR16/LED/6W/927	6	50	500	83	90	Frosted	2700K	25000	1.97	DIM,DL,T20	6
80438-SU	MR16/LED/6W/930	6	50	500	83	90	Frosted	3000K	25000	1.97	DIM,DL,T20	6
80439-SU	MR16/LED/6W/940	6	50	500	83	90	Frosted	4000K	25000	1.97	DIM,DL,T20	6
80440-SU	MR16/LED/6W/950	6	50	500	83	90	Frosted	5000K	25000	1.97	DIM,DL,T20	6

Mini Reflector Lamps

Spotlight Lamps

120 Volts

Twist & Lock (GU10)



Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
2-Pin GU5.3 120V 90 CRI												
80508-SU	MR16/LED/5W/GU5.3/120V/30K	5	50	450	90	80	Frosted	3000K	30000	2.04	T20	6
Twist & Lock (GU10) 120V												
80521-SU	PAR16/LED/7W/GU10/27K	7	50	500	71	83	Frosted	2700K	25000	1.97	DIM,DL,ES	6
80522-SU	PAR16/LED/7W/GU10/30K	7	50	550	79	83	Frosted	3000K	25000	1.97	DIM,DL,ES	6
82043-SU	PAR16/GU10/LED/6W/CRI90/D/E/30K/6PK	6	50	500	83	90	Frosted	3000K	25000	2.11	DIM,DL,T20,ES	12
80527-SU	PAR16/LED/7W/GU10/40K	7	50	550	79	83	Frosted	4000K	25000	1.97	DIM,DL,ES	6
80528-SU	PAR16/LED/7W/GU10/50K	7	50	550	79	84	Frosted	5000K	25000	1.97	DIM,ES	6
80529-SU	PAR16/LED/7W/GU10/65K	7	50	500	71	86	Frosted	6500K	25000	1.97	DIM,DL,ES	6
Colored 120V												
80520-SU	PAR16/LED/3W/GU10/BLUE	3	25	60	20	-	Frosted	Blue	15000	1.97	DL	6
220 Volts												
80306-SU	MR16/LED/6W/40K/GU10/220V	6	40	470	78	80	Frosted	4000K	20000	2.06		6

Reflector Lamps

AR111 Aluminum Reflector

12 Volts
Screw Terminal (G53)




Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
Screw Terminal (G53)												
81008-SU	AR111/LED/10W/30K/12D	10	50	750	75	80	Frosted	3000K	15000	2.65		6
81009-SU	AR111/LED/10W/30K/24D	10	50	750	75	80	Frosted	3000K	15000	2.65		6
81019-SU	AR111/LED/10W/30K/35D	10	50	750	75	80	Frosted	3000K	15000	2.65		6

Sign Lamps

Filament Style

120 Volts
Medium Screw (E26)

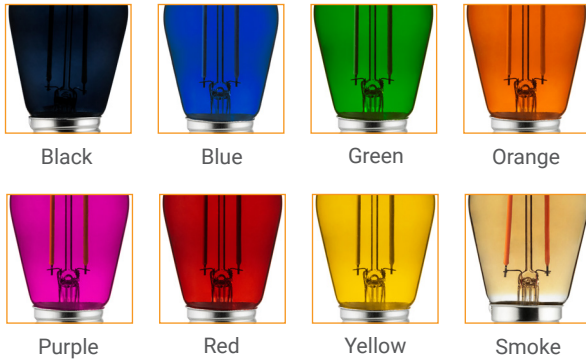

Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
Medium Screw (E26)												
81079-SU	S14/LED/FS/2W/22K	2	25	200	100	80	Clear	2200K	15000	3.34	DIM,WL	6
41655-SU	S14/LED/FS/2W/22K/6PK	2	25	200	100	80	Clear	2200K	15000	3.34	DIM,DL	8
81073-SU	S14/LED/FS/2W/27K	2	25	200	100	80	Clear	2700K	15000	3.46	DIM,DL	6
80474-SU	S14/LED/FS/4W/D/CL/22K	4	30	340	85	90	Clear	2200K	15000	3.46	DIM,DL	6
Medium Screw (E26)												
40322-SU	S14/LED/FS/4W/27K/6PK	4	25	340	85	90	Clear	2700K	15000	3.46	DIM,DL	8
40973-SU	S14/LED/FS/2W/TBL/6PK	2	-	-	-	-	Transp	Black Light Blue	15000	3.46	DIM,WL	8
40972-SU	S14/LED/FS/2W/TB/6PK	2	-	-	-	-	Transp	Blue	15000	3.46	DIM,DL	8
40974-SU	S14/LED/FS/2W/TG/6PK	2	-	-	-	-	Transp	Green	15000	3.46	DIM,DL	8
40975-SU	S14/LED/FS/2W/TO/6PK	2	-	-	-	-	Transp	Orange	15000	3.46	DIM,DL	8
40976-SU	S14/LED/FS/2W/TP/6PK	2	-	-	-	-	Transp	Purple	15000	3.46	DIM,DL	8
40977-SU	S14/LED/FS/2W/TR/6PK	2	-	-	-	-	Transp	Red	15000	3.46	DIM,DL	8
81093-SU	S14/LED/FS/2W/A	2	-	-	-	-	Transp	Amber	15000	3.46	DIM	6

Sign Lamps

Party & Decorative



120 Volts
Medium Screw (E26)

Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
S14 Sign Medium Screw (E26)												
81067-SU	S14/LED/CL/1W/27K/E26	1	10	50	50	80	Clear	2700K	15000	3.23	DL	6
40988-SU	S14/LED/FR/1W/27K/E26/6PK	1	10	50	50	80	Frosted	2700K	15000	3.23	DL	8

Night Lights

Holiday

120 Volts
Candelabra Screw (E12) / Intermediate Screw (E17)




Green

Red

Yellow

White



C7




C9

Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
C7 Candelabra Screw (E12)												
80700-SU	L3C7/LED/B/6PK	0.4		1.8	5	-	Blue	Blue	50000	2.25		20
80701-SU	L3C7/LED/G/6PK	0.4		8.3	21	-	Green	Green	50000	2.25		20
80702-SU	L3C7/LED/R/6PK	0.4		4	10	-	Red	Red	50000	2.25		20
80704-SU	L3C7/LED/Y/6PK	0.4		3.5	9	-	Yellow	Yellow	50000	2.25		20
C9 Intermediate Screw (E17)												
80705-SU	L3C9/LED/B/6PK	0.4		2.5	6	-	Blue	Blue	50000	2.95		20
80706-SU	L3C9/LED/G/6PK	0.4		12	30	-	Green	Green	50000	2.95		20
80707-SU	L3C9/LED/R/6PK	0.4		5.5	14	-	Red	Red	50000	2.95		20
80709-SU	L3C9/LED/Y/6PK	0.4		4.5	11	-	Yellow	Yellow	50000	2.95		20

Decorative Lamps

Star Filament

120 Volts
Candelabra Screw (E12) / Medium Screw (E26)



Chandelier (E12)



Globe (E26)




S14 (E26)

Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
Candelabra Screw (E12)												
80129-SU	CTC/LED/SF/1W/CL/23K	1		120	120	80	Clear	2300K	20000	1.38		12
Globe Medium Screw (E26)												
80154-SU	G40/LED/SF/1.8W/CL/23K	1.8		120	67	80	Clear	2300K	20000	4.92		24
S14 Medium Screw (E26)												
80362-SU	S14/30LED/MED/B	1.7	10	15	9	-	Transp	Blue	30000	3.14		6

Decorative Lamps

Party & Decorative

100-260 Volts
Medium Screw (E26)



Globe



ST64



Star

Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
G25												
81173-SU	G25/LED/DX/1.5W/P	1.5	-	-	-	-	Clear	Purple	20000	4.2		6
G30												
81180-SU	G30/LED/DX/1.5W/B	1.5	-	-	-	-	Clear	Blue	20000	5.2		6
81181-SU	G30/LED/DX/1.5W/G	1.5	-	-	-	-	Clear	Green	20000	5.2		6
81179-SU	G30/LED/DX/1.5W/P	1.5	-	-	-	-	Clear	Purple	20000	5.2		6
81183-SU	G30/LED/DX/1.5W/RGB	1.5	-	-	-	-	Clear	RGB	20000	5.2		6
G40												
81186-SU	G40/LED/DX/1.5W/B	1.5	-	-	-	-	Clear	Blue	20000	6.8		6
81187-SU	G40/LED/DX/1.5W/G	1.5	-	-	-	-	Clear	Green	20000	6.8		6
81184-SU	G40/LED/DX/1.5W/R	1.5	-	-	-	-	Clear	Red	20000	6.8		6
ST64												
81190-SU	ST64/LED/DX/1.5W/B	1.5	-	-	-	-	Clear	Blue	20000	5.5		6
81191-SU	ST64/LED/DX/1.5W/G	1.5	-	-	-	-	Clear	Green	20000	5.5		6
81188-SU	ST64/LED/DX/1.5W/R	1.5	-	-	-	-	Clear	Red	20000	5.5		6
81192-SU	ST64/LED/DX/1.5W/27K	1.5	-	-	-	-	Clear	2700K	20000	5.5		6
Star												
81194-SU	STAR/LED/DX/1.5W/27K	1.5	-	-	-	-	Clear	2700K	20000	5.7		6

Decorative Lamps

Filament Style

120 Volts
Medium Screw (E26)



PS30



Clear



Amber

Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
PS30 Amber												
81098-SU	PS30/LED/FS/4.5W/22K/AMBER	4.5		250	56	80	Amber	2200K	15000	6.68	DIM,DL	6
Flame Tip Medium Screw (E26)												
80449-SU	EFC/LED/FS/4W/E26/D/CL/18K	4	40	320	80	83	Clear	1800K	15000	4.25	DIM,DL	6
80421-SU	EFC/LED/FS/4W/E26/D/E/CL/27K	4	40	400	100	80	Clear	2700K	15000	4.25	DIM,DL	6
40 Watt Equivalent												
80753-SU	S19/LED/FS/4.5W/CL/27K	4.5	40	400	89	85	Clear	2700K	15000	5.04	DIM,DL,EXF	6
60 Watt Equivalent												
80461-SU	S19/LED/FS/6W/D/CL/22K/LF	6	60	600	100	80	Clear	2200K	15000	5.51	DIM,DL	6
80898-SU	S19/LED/FS/6W/927	6	60	600	100	90	Clear	2700K	15000	4.88	DIM,DL	6
75 Watt Equivalent												
41803-SU	S19/LED/FS/8.5W/CL/22K/LF/6PK	8.5	60	880	104	85	Clear	2200K	15000	5.04	DIM,DL,EXF	12
80750-SU	S19/LED/FS/8.5W/CL/27K/LF	8.5	75	880	104	85	Clear	2700K	15000	5.04	DIM,DL,EXF	6

Tubular

Filament Style

120 Volts

Intermediate Screw (E17) / Medium Screw (E26)



Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
T6 Intermediate Screw (E17)												
A 41072-SU	T6.5/LED/FS/2W/CL/E17/27K/139MM/6PK	2	25	180	90	80	Clear	2700K	15000	5.51	DL	10
T8 Candelabra Screw (E12)												
B 40237-SU	T8/LED/FS/2W/E12/22K/85MM/6PK	2	25	120	60	80	Clear	2200K	15000	3.38	DIM,DL,EXF	10
80502-SU	T8/LED/FS/2W/E12/D/CL/27K/85MM	2	25	130	65	80	Clear	2700K	15000	1.27	DIM,DL,EXF	12
80498-SU	T8/LED/FS/2W/E12/27K/85MM/6PK	2	25	130	65	80	Clear	2700K	15000	3.34	DIM,DL	10
41344-SU	T8/LED/FS/2W/E12/D/CL/27K/85MM/12PK	2	25	130	65	80	Clear	2700K	15000	3.42	DIM	12
T8 Medium Screw (E26)												
C 80490-SU	T8/LED/FS/5W/E26/22K/214MM	5	40	430	86	80	Clear	2200K	15000	8.42	DIM,DL	10
80482-SU	T8/LED/FS/5W/E26/D/CL/27K/204MM	5	40	430	86	80	Clear	2700K	15000	8.42	DIM,DL	10
80519-SU	T8/LED/FS/5W/922/300MM	5	40	450	90	90	Clear	2200K	15000	11.81	DIM,T20	10
80491-SU	T8/LED/FS/5W/927/300MM	5	40	450	90	90	Clear	2700K	15000	11.8	DIM,DL,T20	10
T10 Medium Screw (E26)												
D 80610-SU	T10/LED/FS/2W/E26/CL/22K/126MM	2	25	160	80	85	Clear	2200K	15000	4.92	DIM	12
80623-SU	T10/LED/FS/2W/927/126MM	2	25	160	80	90	Clear	2700K	15000	4.96	DIM,DL	10
41790-SU	T10/LED/FS/2W/927/126MM/6PK	2	25	160	80	90	Clear	2700K	15000	4.96	DIM,DL	10
80625-SU	T10/LED/FS/2W/930/126MM	2	25	160	80	90	Clear	3000K	15000	4.96	DIM,DL	10
41791-SU	T10/LED/FS/2W/930/126MM/6PK	2	25	160	80	90	Clear	3000K	15000	4.96	DIM,DL	10
80627-SU	T10/LED/FS/2W/940/126MM	2	25	160	80	90	Clear	4000K	15000	4.96	DIM,DL	10
41792-SU	T10/LED/FS/2W/940/126MM/6PK	2	25	160	80	90	Clear	4000K	15000	4.96	DIM,DL	10
80628-SU	T10/LED/FS/2W/950/126MM	2	25	160	80	90	Clear	5000K	15000	4.96	DIM,DL	10
41793-SU	T10/LED/FS/2W/950/126MM/6PK	2	25	160	80	90	Clear	5000K	15000	4.96	DIM,DL	10
E 80612-SU	T10/LED/FS/6W/E26/CL/22K/128MM	6	40	460	77	85	Clear	2200K	15000	4.92	DIM	12
41150-SU	T10/LED/FS/6W/E26/CL/27K/128MM/6PK	6	60	600	100	85	Clear	2700K	15000	4.92	DIM,DL,EXF	10
T10 Medium Screw (E26)												
80617-SU	T10/LED/FS/6W/922/222MM	6	60	570	95	90	Clear	2200K	15000	8.74	DIM,WL,EXF,T20	10
F 80621-SU	T10/LED/FS/6W/927/222MM	6	60	570	95	90	Clear	2700K	15000	8.75	DIM,DL,T20	10
T12 Medium Screw (E26)												
80458-SU	T12/LED/FS/3W/E26/D/CL/22K/104MM	3	25	240	80	80	Clear	2200K	15000	4.09	DIM,DL,EXF	12
G 80892-SU	T12/LED/FS/3W/E26/D/CL/27K/100MM	3	25	350	117	85	Clear	2700K	15000	4.25	DIM	6
T14 Medium Screw (E26)												
H 80608-SU	T14/LED/FS/6W/22K/AMBER/127MM	6	60	660	110	80	Amber	2200K	25000	5.04	DIM	12

Decorative Lamps

Pattern Thread

120 Volts
Medium Screw (E26)



G30

G40

Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
81254-SU	G30/PT/3.5W/20K/AG	3.5		120	34	80	Amber	2000K	15000	5.55	DIM,DL	6
81255-SU	G40/PT/3.5W/20K/AG	3.5		120	34	80	Amber	2000K	15000	6.3	DIM,DL	6

Elevator Bulb

1383 / GBF

12 Volts
Single Contact Bayonet (BA15s) / Double Contact Bayonet (BA15d)



A

B

C

Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
Single Contact Bayonet (BA15s)												
A 80360-SU	1383/LED/3W/30K	3	20	125	42	80	Silver	3000K	20000	6.5		50
B 80368-SU	1383/LED/3W/30K/V2	3	20	210	70	80	Silver	3000K	20000	6.5		50
80369-SU	1383/LED/3W/40K/V2	3	20	210	70	80	Silver	4000K	20000	6.5		50
C Double Contact Bayonet (BA15d)												
80358-SU	GBF/LED/3W/30K	3	20	125	42	80	Sliver	3000K	20000	2.25		50

Tubular

Miniature

120 Volts
Candelabra Screw (E12) / Intermediate Screw (E17)



S6

T5

T6

T7

Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
S6 Appliance Candelabra Screw (E12)												
41069-SU	S6/LED/CL/1W/27K/E12/6PK	1	10	50	50	80	Clear	2700K	15000	1.85	DL	10
T5 Candelabra Screw (E12)												
41244-SU	T5/LED/CL/1W/27K/E12/6PK	1	10	50	50	80	Clear	2700K	15000	1.73		20
T6 Candelabra Screw (E12)												
81071-SU	T6/LED/CL/1W/27K/E12/CD1	1	10	50	50	80	Clear	2700K	15000	1.77	DL	12
T7 Intermediate Screw (E17)												
81070-SU	T7/LED/CL/1W/27K/E17/TUBULAR	1	10	50	50	80	Clear	2700K	15000	2.09	DL	12

Colored Tubular

Party & Decorative

120 Volts
Candelabra Screw (E12) / (E26)



Blue



Green



Red



Yellow



E12

Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
Candelabra Screw (E12)												
80256-SU	1T10/C/B	0.5	-	-	-	-	-	Blue	30000	2.28		10
80268-SU	1T10/C/G	0.5	-	-	-	-	-	Green	30000	2.28		10
80269-SU	1T10/C/R	0.5	-	-	-	-	-	Red	30000	2.28		10
80272-SU	1T10/C/Y	0.5	-	-	-	-	-	Yellow	30000	2.28		10

Halogen Alternative

Specialty Lamps

12 / 120 Volts
Recessed Single Contact (R7s) / G4 / G9



Long
(R7S)



G4
(Clear)



G4
(Frosted)



G9



G9
(Glass)

Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
Long Recessed Single Contact (R7s) 120V												
81018-SU	R7S/LED/8.5W/118MM/T8/30K/CD2	8.5	75	900	106	80	Clear	3000K	10000	4.6	DL	12
G4 12V												
80861-SU	G4/LED/1.5W/CL/12V/D/30K/	1.5	15	200	133	80	Clear	3000K	25000	1.53	DIM,DL	10
80807-SU	G4/LED/2.5W/12V/W/CD1	2.5	20	220	88	80	Frosted	6000K	30000	2.36		12
G9 120V												
80866-SU	G9/LED/2.5W/CL/120V/D/30K	2.5	25	250	100	80	Clear	3000K	25000	2.04	DIM	100
G9 120V												
80811-SU	G9/LED/2W/CL/120V/30K	2	25	600	300	80	Clear	3000K	15000	1.96	WL	12
80813-SU	G9/LED/3W/CL/120V/30K	3	40	400	133	80	Clear	3000K	15000	2.36	WL	12
41579-SU	G9/LED/4W/CL/120V/30K/6PK	4	50	500	125	80	Clear	3000K	15000	2.36	DL,EXF	120
80819-SU	G9/LED/4W/CL/120V/50K	4	60	500	125	80	Clear	5000K	15000	2.36	DL	12

Linestra Lamps

Vanity

120 Volts
Linestra Base (S14s)



Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
53149-SU	LN/LED/5W/DIM/27K/120V	5	35	420	84	80	Frosted	2700K	30000	11.81	DIM	25
53150-SU	LN/LED/8W/DIM/27K	8	60	660	83	80	Frosted	2700K	30000	19.7	DIM	25
53155-SU	LN/LED/16W/DIM/27K	16	150	1300	81	80	Frosted	2700K	30000	39.4	DIM	12

Plug-In Lamps

Fluorescent Replacements

120-277 Volts
4-Pin (2G11)



Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
Bypass FT												
81055-SU	FT/LED/BP/23W/30K	23	55	2300	100	82	Frosted	3000K	50000	22.16	DL,EXF	10
81056-SU	FT/LED/BP/23W/40K	23	55	2800	122	82	Frosted	4000K	50000	22.16	DL	10
Plug and Play FT												
81061-SU	FT/LED/IS/17W/30K	17	40	2350	138	82	Frosted	3000K	50000	22.48	DL,DLC	10
81062-SU	FT/LED/17W/IS/35K	17	40	2350	138	82	Frosted	3500K	50000	22.48	DL,DLC	10
81063-SU	FT/LED/IS/17W/40K	17	40	2500	147	82	Frosted	4000K	50000	21.88	DL	10
81064-SU	FT/LED/17W/IS/50K	17	40	2500	147	82	Frosted	5000K	50000	21.88	DL	10

Refrigerator Display Strip

Wet Rated

120-277 Volts
82 CRI



Linkable Connector



Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
Operating environment temperatures from -4 degrees to 104 degrees Fahrenheit (-20 to 40 Celsius)												
88206-SU	SF/FR/LN/48/18/850/MV/WH	18	-	2250	80	82	Clear	5000K	50000	48	DLC, IP65	10
88184-SU	LFX/LFL/22W/MV/50K/5/V2	22	-	2196	100	82	Clear	5000K	50000	59	DLC, IP65	10

Plug-In Lamps

Fluorescent Replacements



120-277 Volts
G24q / G24d / GX23



PLD



PLD
(SCT Verion)



PLT
(Plug & Play Version)



PLV




PLV
(SCT Verion)


Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
Bypass PLD 2-Pin LED Base (G24q)												
88800-SU	PLD/LED/BP/8W/SCT	8	18	950	119	80	Frosted	30K/40K/50K	50000	5.86	DL	12
88292-SU	PLD/LED/BP/9W/30K	9	18	950	106	82	Frosted	3000K	50000	6.61	DL,EXF	12
88299-SU	PLD/LED/BP/9W/40K	9	18	1000	111	82	Frosted	4000K	50000	6.65	DL	12
88298-SU	PLD/LED/BP/9W/50K	9	18	1000	111	82	Frosted	5000K	50000	6.65	DL,EXF	12
88802-SU	PLD/LED/BP/11W/SCT	11	26	1400	127	80	Frosted	30K/40K/50K	50000	5.86	DL	12
Plug and Play PLD 4-Pin LED Base (G24q)												
88271-SU	PLD/LED/9W/IS/30K/V2	9	18	950	106	82	Frosted	3000K	50000	6.57	DL,EXF	12
88269-SU	PLD/LED/9W/IS/35K/V2	9	18	1050	117	82	Frosted	3500K	50000	6.57	DL,EXF	12
88273-SU	PLD/LED/IS/9W/40K/V2	9	18	1100	122	82	Frosted	4000K	50000	6.57	DL,EXF	12
88275-SU	PLD/LED/9W/IS/50K/V2	9	18	1100	122	82	Frosted	5000K	50000	6.57	DL	12
88804-SU	PLD/LED/IS/11W/SCT	11	18	1025	93	80	Frosted	30K/40K/50K	50000	5.86	DL,EXF	12
Plug and Play PLT 4-Pin LED Base (G24q)												
88277-SU	PLT/G24q/LED/IS/16W/35K	16	26	1750	109	82	Frosted	3500K	50000	6.35	DL	12
88278-SU	PLT/G24q/LED/IS/16W/40K	16	26	1850	116	82	Frosted	4000K	50000	6.35	DL	12
Bypass Vertical 4-Pin LED Base (G24q)												
85425-SU	PLV/LED/BP/8W/G23/30K	8	13	700	88	80	Frosted	3000K	50000	4.52	DL,EXF	12
85426-SU	PLV/LED/BP/8W/G23/40K	8	13	700	88	80	Frosted	4000K	50000	4.52	DL,EXF	12
Bypass Vertical 4-Pin LED Base (G24d)												
88801-SU	PLV/LED/BP/8W/SCT	8	18	950	119	80	Frosted	30K/40K/50K	50000	4.66	DL	12
88803-SU	PLV/LED/BP/11W/SCT	11	26	1400	127	80	Frosted	30K/40K/50K	50000	4.66	DL	12
Bypass Vertical 4-Pin LED Base (GX23)												
85430-SU	PLV/LED/BP/8W/GX23/30K	8	13	700	88	80	Frosted	3000K	50000	4.78	DL,EXF	12
85431-SU	PLV/LED/BP/8W/GX23/40K	8	13	800	100	80	Frosted	4000K	50000	4.78	DL,EXF	12
Plug and Play Vertical 4-Pin LED Base (G24q)												
88214-SU	PLV/E/LED/IS/9W/35K/V2	9	18	950	106	82	Frosted	3500K	50000	4.66	EXF	12
88213-SU	PLV/E/LED/IS/9W/40K/V2	9	18	1000	111	82	Frosted	4000K	50000	4.66	EXF	12
88805-SU	PLV/LED/IS/11W/SCT	11	26	1400	127	80	Frosted	30K/40K/50K	50000	4.66	DL	12

Bypass Installation

Step 1
Cut off the wires and
remove the ballast



Step 2
Reconnect the wires and
plug in the lamps



T5 / T8 Advanced Bypass Dual End

Linear Tube Lamp

120-277 Volts
80 CRI



Miniature Bi-Pin (G5)



Medium 2-Pin (G13)



R17d



Fa8

Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
2 Foot F24T5 Replacement Miniature Bi-Pin (G5)												
87985-SU	T5/LED/BPD/2'/12W/30K	12	F24T5	1400	117	80	Frosted	3000K	50000	23.22		10
87986-SU	T5/LED/BPD/2'/12W/40K	12	F24T5	1400	117	80	Frosted	4000K	50000	23.22		10
87987-SU	T5/LED/BPD/2'/12W/50K	12	F24T5	1500	125	80	Frosted	5000K	50000	23.22		10
3 Foot F39T5 Replacement Miniature Bi-Pin (G5)												
87990-SU	T5/LED/BPD/3'/16W/30K	16	F39T5	1800	113	80	Frosted	3000K	50000	35.7		10
4 Foot F28T5 Replacement Miniature Bi-Pin (G5)												
88486-SU	T5/LED/BPD/4'/13W/35K	13	F28T5	1600	123	80	Frosted	3500K	50000	45.8	DL,EXF,DLC	25
88487-SU	T5/LED/BPD/4'/13W/40K	13	F28T5	1650	127	80	Frosted	4000K	50000	45.8	DL,EXF,DLC	25
88488-SU	T5/LED/BPD/4'/13W/50K	13	F28T5	1700	131	80	Frosted	5000K	50000	45.8	DL,EXF,DLC	25
4 Foot F54T5 Replacement Miniature Bi-Pin (G5)												
88415-SU	T5/LED/BPD/4'/25W/30K	25	F54T5/HO	3300	132	82	Frosted	3000K	50000	45.78	DL,DLC	25
88416-SU	T5/LED/BPD/4'/25W/35K	25	F54T5/HO	3300	132	82	Frosted	3500K	50000	45.8	DL,EXF,DLC	10
88417-SU	T5/LED/BPD/4'/25W/40K	25	F54T5/HO	3500	140	82	Frosted	4000K	50000	45.8	DL,EXF,DLC	25
88418-SU	T5/LED/BPD/4'/25W/50K	25	F54T5/HO	3500	140	82	Frosted	5000K	50000	45.8	DL,EXF,DLC	25
2 Foot F17T8 Replacement Medium 2-Pin (G13)												
88432-SU	T8/LED/BPD/2'/9W/50K	9	F17T8	1150	128	82	Frosted	5000K	50000	23.22	DL,EXF	25
88043-SU	T8/LED/HY/2'/10W/3SCT/G2	10	F17T8	1450	145	83	Frosted	35K/40K/50K	50000	23.22	DL,DLC	25
3 Foot F25T8 Replacement Medium 2-Pin (G13)												
88444-SU	T8/LED/HY/3'/12W/3SCT/G2	12	F25T8	1700	142	82	Frosted	35K/40K/50K	50000	36.0	DL,DLC	25
4 Foot F32T8 Replacement Medium 2-Pin (G13)												
88433-SU	T8/LED/BPD/4'/14W/30K	14	F32T8	1700	121	82	Frosted	3000K	50000	47.67	DL,EXF	25
88425-SU	T8/LED/BPD/4'/14W/40K	14	F32T8	1800	129	82	Frosted	4000K	50000	35.77	DL	25
88435-SU	T8/LED/BPD/4'/14W/50K	14	F32T8	1800	129	82	Frosted	5000K	50000	47.67	DL,EXF	25
88449-SU	T8/LED/BPD/4'/14W/65K	14	F32T8	1800	129	82	Frosted	6500K	50000	47.67	DL,EXF	25
4 Foot F32T8 Replacement High Lumens Medium 2-Pin (G13)												
88424-SU	T8/LED/BPD/4'/17W/30K	17	F32T8	2100	124	82	Frosted	3000K	50000	35.77	DL	25
88475-SU	T8/LED/BPD/4'/17W/40K	17	F32T8	2200	129	82	Frosted	4000K	50000	47.67	DL,EXF	25
88477-SU	T8/LED/BPD/4'/17W/50K	17	F32T8	2200	129	82	Frosted	5000K	50000	47.67	DL	25
88439-SU	T8/LED/BPD/4'/17W/65K	17	F32T8	2200	129	82	Frosted	6500K	50000	47.67	DL	25
8 Foot F59T8 Replacement Recessed Double Ended Contact (R17D)												
88444-SU	T8/LED/BPD/8'/42W/5SCT	42	F59T8	5500	128	82	Frosted	30K/35K/40K/50K/65K	50000	94		10
88443-SU	T8/LED/BPD/8'/43W/65K	43	F59T8	5500	128	82	Frosted	6500K	50000	94		10
8 Foot F86T8 Replacement Double Ended (Fa8)												
88452-SU	T8/LED/BPD/8'/43W/40K/HO	43	F86T8	5500	128	82	Frosted	4000K	50000	94	DL,EXF	10

Advanced Dual End Bypass Installation

Fluorescent Tube
Step 1
Cut off the wires and remove the ballast

LED Tube
Step 2
Reconnect the wires

*Dual-end powered LED tube lamp has live and neutral pins on the opposite side. When you wire a dual-ended tube, you will need to connect neutral wires to one end and live wires to the other end.

T5 / T8 Plug and Play

Linear Tube Lamp

120-277 Volts
80 CRI



Miniature Bi-Pin (G5)



Medium 2-Pin (G13)




SCT Medium 2-Pin (G13)



Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
2 Foot F24T5 Replacement Miniature Bi-Pin (G5)												
88221-SU	T5/LED/IS/2'/11W/40K	11	F24T5	1400	127	82	Frosted	4000K	50000	23.22	DL,EXF	10
88222-SU	T5/LED/IS/2'/11W/50K	11	F24T5	1400	127	82	Frosted	5000K	50000	23.22	DL,EXF	25
3 Foot F39T5 Replacement Miniature Bi-Pin (G5)												
87980-SU	T5/LED/IS/3'/18W/30K/HL	18	F39T5	2100	117	80	Frosted	3000K	50000	35.7		10
87981-SU	T5/LED/IS/3'/18W/40K/HL	18	F39T5	2100	117	80	Frosted	4000K	50000	35.7		10
4 Foot F54T5 Replacement Miniature Bi-Pin (G5)												
88421-SU	T5/LED/IS/4'/25W/40K/HL	25	F54T5	3500	140	82	Frosted	4000K	50000	45.8	DL,EXF	25
88230-SU	T5/LED/IS/4'/25W/50K/HL	25	F54T5	3200	128	82	Frosted	5000K	50000	45.8	DL,EXF	10
88423-SU	T5/LED/4'/25W/IS/65K/	25	F54T5	3500	140	82	Frosted	6500K	50000	45.8	DL,EXF	25
2 Foot F17T8 Replacement Medium 2-Pin (G13)												
88402-SU	T8/LED/2'/8W/IS/50K/V2	8	F17T8	1250	156	82	Frosted	5000K	50000	23.22	DL,EXF,DLC	25
88403-SU	T8/LED/IS/2'/8W/65K/V2	8	F17T8	1250	156	82	Frosted	6500K	50000	23.22	DL,EXF	10
3 Foot F25T8 Replacement Medium 2-Pin (G13)												
87971-SU	T8/LED/IS/3'/10W/40K/V2	10	F25T8	1450	145	82	Frosted	4000K	50000	35.7	DL,DLC	25
87963-SU	T8/LED/IS/3'/10W/65K	10	F25T8	1450	145	82	Frosted	6500K	50000	35.7	DL,EXF,DLC	10
4 Foot F32T8 Replacement Medium 2-Pin (G13)												
87922-SU	T8/LED/IS/4'/11W/D/40K	11	F32T8	1800	164	82	Frosted	4000K	50000	47.7	DL,DLC	25
87923-SU	T8/LED/IS/4'/11W/D/50K	12	F32T8	1800	150	82	Frosted	5000K	50000	47.7	DL,DLC	25
4 Foot F32T8 Replacement High Lumens Medium 2-Pin (G13)												
87925-SU	T8/LED/IS/4'/14W/D/30K	14	F32T8	2100	150	82	Frosted	3000K	50000	47.7	DL,DLC	25
87926-SU	T8/LED/IS/4'/14W/D/35K	14	F32T8	2200	157	82	Frosted	3500K	50000	47.7	DLC	25
87928-SU	T8/LED/IS/4'/14W/D/50K	14	F32T8	2200	157	82	Frosted	5000K	50000	47.7	DL,DLC	25
87929-SU	T8/LED/IS/4'/14W/D/65K	15	F32T8	2200	147	82	Frosted	6500K	50000	47.7	DIM,DL,EXF,DLC	25
SCT Medium 2-Pin (G13)												
88043-SU	T8/LED/HY/2'/10W/3SCT/G2	10	F17T8	1450	145	83	Frosted	35K/40K/50K	50000	23.22	DL,DLC	25
88044-SU	T8/LED/HY/3'/12W/3SCT/G2	12	F25T8	1700	142	83	Frosted	35K/40K/50K	50000	35.7	DL,DLC	25
88045-SU	T8/LED/HY/4'/12.5W/3SCT/G2	12.5	F32T8	1800	144	80	Frosted	35K/40K/50K	50000	47.7	DL,DLC	25
6500K Medium 2-Pin (G13) Shatter Proof												
88040-SU	T8/LED/HY/4'/18W/65K	18	F32T8	2300	128	83	Frosted	6500K	50000	47.16	DIM,DL,EXF,DLC	25

Plug and Play Installation

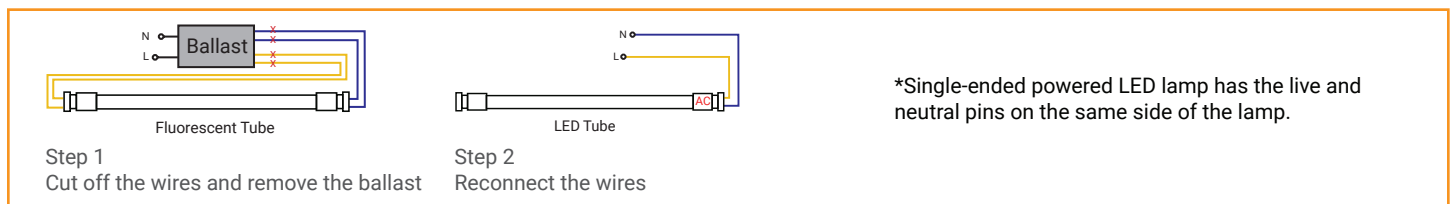

T8 Single & Dual End Hybrid

Linear Tube Lamp



120-277 Volts
Medium 2-Pin (G13)



Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
U-Bend												
87913-SU	T8/LED/HY/6U/15W/3SCT	15	FB32	1900	127	83	Frosted	35K/40K/50K	50000	22.8	DL,EXF	12

High Lumen Lamps

High Bay lamp

120-277 Volts
Medium Screw (E26)



Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
Medium Screw (E26)												
81256-SU	HL/LED/T32/E26/20W/30K	20	225	2600	130	80	Frosted	3000K	50000	5.75	WL	6
81265-SU	HL/LED/T32/E26/20W/50K	20	225	2600	130	80	Frosted	5000K	50000	5.75	WL	6
81262-SU	HL/LED/T36/E26/27W/50K	27	300	3500	130	80	Frosted	5000K	50000	7.09	WL	6
81252-SU	HL/LED/T36/E26/40W/50K	40	375	4800	120	80	Frosted	5000K	50000	8.07	WL	6
81259-SU	HL/LED/T36/E26/45W/30K	45	525	5800	129	80	Frosted	3000K	50000	9.45	WL	6
81266-SU	HL/LED/T36/E26/45W/50K	45	525	5800	129	80	Frosted	5000K	50000	9.45	WL	6

High Lumen Lamps

High Bay lamp

120-277 Volts
Mogul Screw (E39)



Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
Mogul Screw (E39)												
80871-SU	HBR/LED/60W/50K	60	150	9000	150	80	Frosted	5000K	50000	9.17	DIM,DL	4
80872-SU	HBR/LED/100W/50K	100	250	15000	150	80	Frosted	5000K	50000	10.83	DIM,DL	4
80873-SU	HBR/LED/140W/E39/50K	140	400	20000	143	80	Frosted	5000K	50000	12.13	DL	4

High Lumen Lamps

Corn Cob

120-277 Volts
Medium Screw (E26) / Mogul Screw (E39)



Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
Medium Screw (E26)												
81457-SU	CC/LED/18W/50K/G4	18	70	2790	155	80	Frosted	5000K	50000	6.38	DL,EXF	12
81428-SU	CC/LED/36W/E26/50K/G4	36	175	5500	153	80	Frosted	5000K	50000	8.27	DIM,DL,EXF	12
81424-SU	CC/LED/27W/E26/50K/G4	27	50	4100	152	80	Frosted	5000K	50000	8.27	DIM,DL,EXF,DLC	12
Mogul Screw (E39)												
81430-SU	CC/LED/45W/E39/50K/G4	45	200	6975	155	80	Frosted	5000K	50000	9.5	DL,EXF,DLC	12
81456-SU	CC/LED/120W/E39/50K/G4	120	600	18600	155	80	Frosted	5000K	50000	11.72	DL,EXF,DLC	6

Garage Light


Adjustable Heads

120-277 Volts
Medium Screw (E26)



90° Adjustable Panels

Each panel is 90° adjustable, which gives a perfect light distribution curve according to your application.

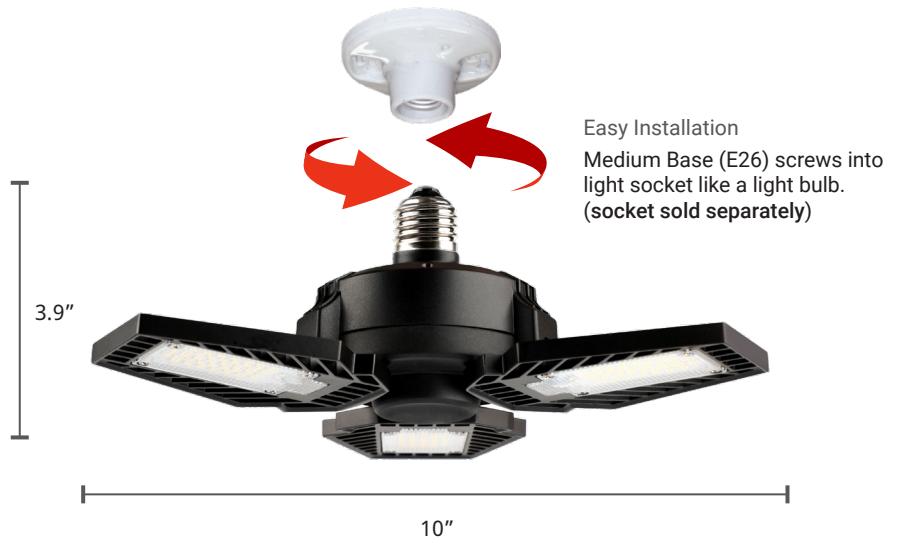

Item#	Description	Watt	Eq. W	Lumen	LPW	CRI	Lens	Kelvin	Hours	Mol (in)	Features	CTN
Medium Screw (E26)												
81249-SU	GRG/LED/50W/50K	50	300	6000	120	80	Black	5000K	25000	10.0	DL	12

Sunshine Lighting
744 Clinton Street
Brooklyn, NY 11231

sunlite

www.sunlite.com



V.1 02/5/2024